RoHS

Mark	ECN NO.	DESCRIPTION	DESIGN	Date:
A	———	New	——	——





NOTE:
1. Material:
   Housing: Lcp,UL94V-0; Color: Black
   Contact: Copper Alloy
   Shell: Stainless Steel
2. FINISH:
   Contact: Au 5u" MIN. Plated on Contact Area,
   100u"MIN. Matte Tin Plated on Solder Tails,
   50u" MIN. Nickel Underplating Over All.
   Shell: Nickel Underplating Over All.
3. Specification:
   3.1: Electrical:
   Contact Current Rating: 0.5A
   Insulation Resistance: 100MΩ Min.
   Contact Resistance: 30 mΩ Max.
   Dielectric Withstanding Voltage: 500V/AC 1Minute
   Operating Temperoture: -40°C ~ 85°C
   3.2 Mechanical:
   Mating Force: 4.4Kgf Max.
   Unmating Force: 0.5~2.5Kgf.
   Durability: 10.000 Cycles.

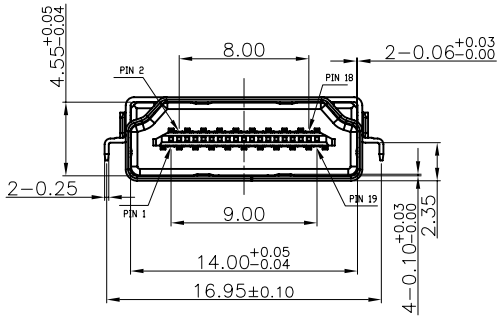









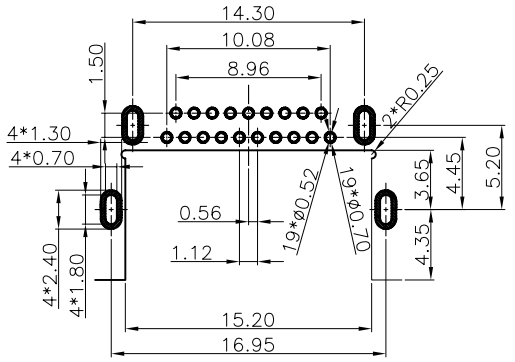

Recommended P.C.B Layout
(TOP VIEW)

Tolerance	Model Name: HDMI反向沉板式 19P DIP型CH=0.225 无弹				Drawing: PYP
X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 Angle ±2.0°	Model No: WLDM-116A				Checked: YSX
	UNIT:	SCALE:	REVISION:	SHEET	Approved: Lijian
	mm	Full	A	1/1	Date: 2015.10.19
	WLCO® 深圳市兴万联电子有限公司 SHENZHEN XINGWANLIAN TECHNOLOGY CO,LTD				DWG NO.
					FILE: C