








RoHS

Mark	ECN NO.	DESCRIPTION	DESIGN	Date:
A		NEW		

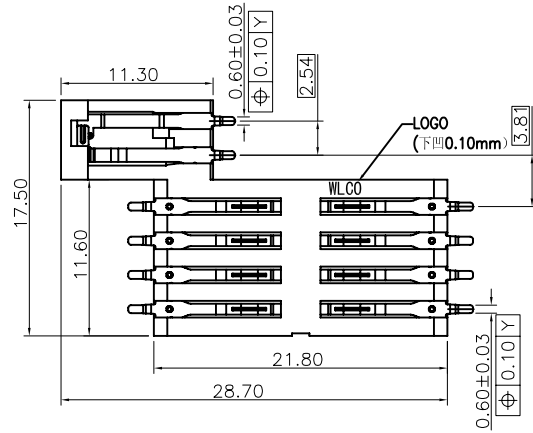


NOTE:

- Material:  
Housing: LCP,UL94V-0;  
Contact: C5191
- FINISH:  
Contact: Au Plated on Contact Arca,  
Matte Tin Plated on Solder Tails,  
Nickel Underplating Over All.
- Specification:  
3.1: Electrical:  
Contact Current Rating: 0.5A  
Insulation Resistance: 100MΩ Min.  
Contact Resistance: 100 mΩ Max.  
Dielectric Withstanding Voltage: 500V/AC 1Minute

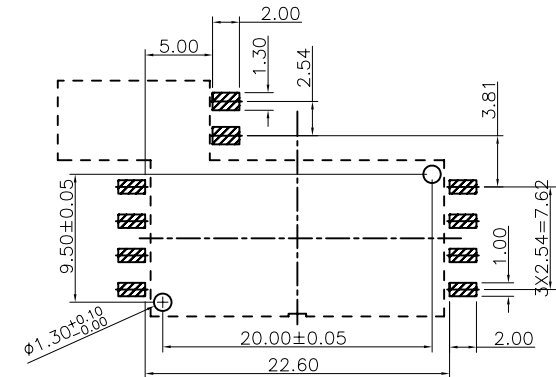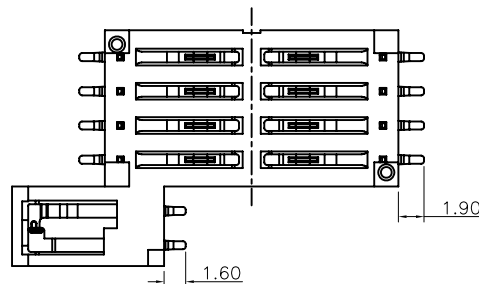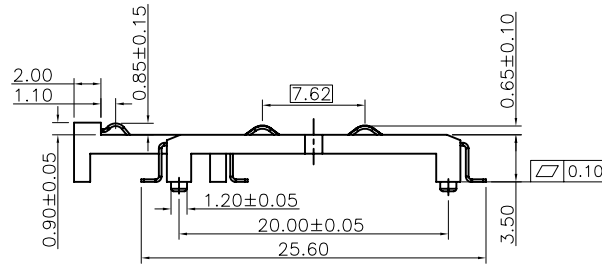

RECOMMENDED P.C.B LAYOUT  
(General tolerance ±0.05)

Tolerance	Model Name:	数码卡座 载带包装			Drawing:	PYP
X.X ±0.30	Model No:	WLS0-007			Checked:	YSX
X.XX ±0.25	UNIT:	SCALE:	REVISION:	SHEET	Approved:	Lijian
X.XXX ±0.15	mm	FULL	A	1/1	Date:	2015.11.11
Angle ±2.0°	 <b>WLCO</b> <sup>®</sup> 深圳市兴万联电子有限公司 SHENZHEN XINGWANLIAN TECHNOLOGY CO.,LTD				DWG NO.	
					FILE:	C